


1.9. 40 ft. Long Basket

- Designed, Constructed, Tested to ISO 10855/DNV2.7-1
- Tarpaulin securing points on all units.
- The units are stackable, reducing lay down area requirements.
- Drainage is designed into the unit to minimize the risk of retained water.
- Multiple internal tie-down points for safe and secure transportation of cargo.
- Ant-slip floor surface.
- Certified Slings complete with shackles are provided according to ISO 10855/DNV2.7-1



► DRAWINGS

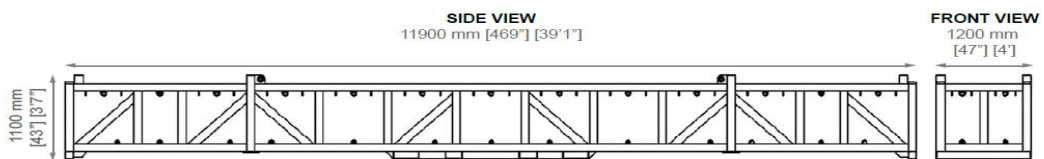

Technical Data	
Dimensions	L x W x H (mm)
External	11900 x 1200 x 1100
Internal	11700 x 1000 x 796
Weight	KGS
Tare	4000
Pay Load	10000
Max-Gross	14000